

VPort P06HC-1MP-M12 Quick Installation Guide

Moxa IP Camera

Edition 3.0, September 2018

Technical Support Contact Information www.moxa.com/support

Moxa Americas:

Toll-free: 1-888-669-2872

Tel: 1-714-528-6777

Fax: 1-714-528-6778

Moxa China (Shanghai office):

Toll-free: 800-820-5036

Tel: +86-21-5258-9955

Fax: +86-21-5258-5505

Moxa Europe:

Tel: +49-89-3 70 03 99-0

Fax: +49-89-3 70 03 99-99

Moxa Asia-Pacific:

Tel: +886-2-8919-1230

Fax: +886-2-8919-1231

Moxa India:

Tel: +91-80-4172-9088

Fax: +91-80-4132-1045

MOXA®

© 2018 Moxa Inc. All rights reserved.

P/N: 1802000061012



Overview

The VPort P06HC-1MP-M12 square-type IP cameras provide an HD (720P, 1280 x 720) video image, and feature 3 H.264/MJPEG video streams, giving them the versatility and ruggedness to excel in many different installations and environments for IP video surveillance applications. In addition, the cameras comply with a portion of EN 50155 specifications, covering operating temperature, power input voltage, surge, ESD, and vibration, making them suitable for a variety of industrial applications. The cameras feature a -25 to 55°C operating temperature, a rugged M12 Ethernet port, 1 built-in microphone, 1 digital input, PoE power inputs, IP66 rain and dust protection, and a selectable lens.

Package Checklist

Moxa's VPort P06HC-1MP-M12 is shipped with the following items. If any of these items are missing or damaged, please contact your customer service representative for assistance.

1 x VPort P06HC-1MP-M12 (lens included)


Standard Temperature Models	Lens
VPort P06HC-1MP-M12-CAM36	3.6 mm
VPort P06HC-1MP-M12-CAM36-CT	3.6 mm

Accessories Package

2 L-type installation kits and 4 nylock screws for mounting the camera



Sticker for Camera Mounting Positions

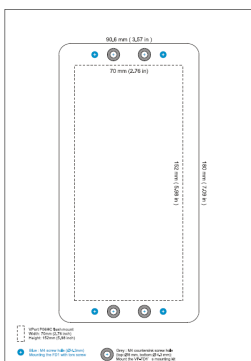

- Quick installation guide (printed)
- Documentation and Software CD (includes User's Manual, Quick Installation Guide, and VPort Utility)
- Warranty card

NOTE Check the model name on the VPort's side label to determine if the model name is correct for your order.

NOTE This product must be installed in compliance with your local laws and regulations.

Features

- 1/2.7"HD progressive CMOS image sensor
- Video stream up to 30 frames/sec at WXGA (1280x800) resolution
- High image quality with WDR (wide dynamic range) and DNR (Digital Noise Reduction) supported
- Minimum illumination is up to 0.2 lux (color)
- Supports MJPEG and H.264 Dual Codecs
- Provides 3 video streams for H.264 and MJPEG simultaneously
- Supports video quality configuration with fixed bit rate (CBR) and fixed quality (VBR)
- Video latency under 200 ms
- DynaStream™ for network efficiency with dynamic frame rate change
- CBR Pro™ supported for high image quality in limited bandwidth transmissions
- WXGA/720P/SVGA/Full D1/4CIF/VGA/CIF/ QCIF resolution
- TCP, UDP, and HTTP network transmission modes
- Supports DHCP OPT66/67 for automatic configuration from a TFTP server, making it easy to batch configure several units
- Supports RTSP streaming
- Supports multicast (IGMP) video streaming
- Supports SNMP (V1/V2C/V3) for network system integration and management
- Supports QoS (ToS) for transmission priority
- Built-in web server for easy configuration
- Accessible IP filtering
- UPnP supported
- Complies with all EN 50155 mandatory test items*


*This product is suitable for rolling stock railway applications, as defined by the EN 50155 standard. For a more detailed statement, click here:

www.moxa.com/doc/specs/EN_50155_Compliance.pdf

- 1 10/100BaseT(X) port with M12 D-code connector
- 1 built-in microphone for audio input
- 1 digital input with 5-pin M12 connector for external events
- IP66 rain and dust protection
- PoE (Power-over-Ethernet, IEEE 802.3af) supported
- -25 to 55°C (EN 50155, class T1) operating temperature for rolling stock environments
- CE, FCC, UL 60950-1
- Built-in tamper alarm and Video Motion Detection (VMD)
- Pre, Trigger, and post snapshot images supported
- Sequential snapshot images supported
- Supports SMTP and FTP for alarm message transmission
- Supports HTTP event server
- 5-year warranty

Product Description

Appearance

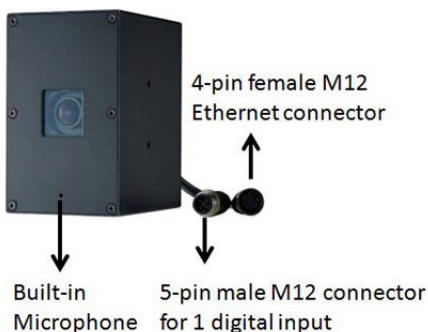





- **4-pin female D-code M12 Ethernet connector:** Can be used for both the PoE power supply (Mode A) and Auto MDI/MDI-X Ethernet connection

PIN	TX
1	TD+
2	RD+
3	TD-
4	RD-



NOTE To connect the VPort P06HC-1MP-M12 to a network, use an Ethernet cable with D-code M12 connector and an M12 PoE switch or RJ45 PoE switch.

<p>M12 male to M12 male cable</p> 	<p>M12 PoE Switch (e.g., TN-5508-4PoE)</p> 
<p>M12 male to RJ45 cable</p> 	<p>RJ45 PoE switch (e.g., EDS-P510)</p> 

NOTE The power input rating of the VPort P06HC-1MP-M12 is 48 VDC, 0.13 A, with maximum power consumption approximately 6.3 W.

NOTE The equipment is designed for in building installation only and is not intended to be connected to exposed (outside a plant) networks

- **5-pin M12 male connector:** The VPort P06HC-1MP-M12 supports one digital input with 5-pin M12 male connector. This DI is used for connecting with external device for triggering an event or alarm.
- **Digital input:** Max. 8 mA,
Low: +13 V to +30 V; High: -30 V to +3 V



Configuration:05 Pins
System: Connector(M)
Mating Cable :Socket (F)
Code :A-polarization

Pin	Signal
1	I+
2	Not used
3	Ground
4	Not used
5	Not used

NOTE This digital input is for connecting with an external device, such as a button, for triggering an event and alarm. The VPort P06HC-1MP-M12 can send messages via an IP network to the management software at a remote site.

- **Built-in microphone:** The VPort P06HC-1MP-M12 is equipped with a built-in microphone to receive external sounds. The sound will be digitized and compressed as an audio stream for network transmission with the video stream.

NOTE The effective distance for the VPort P06HC-1MP-M12's built-in microphone is 100 cm.

NOTE The VPort P06HC-1MP-M12's optical lens cover is coated with a high performance waterproof coating. Please use the scrubbing cloth to light clean the cover.

NOTE The color of the lens cover can be customized based on your installation environment. Please contact your Moxa sales representative for customization service.

Hardware Installation

NOTE To flush mount the VPort P06HC with an intercom, use the VP-FD1 accessory (must be ordered separately) to install the camera. If you do not want to use the VP-FD1, refer to the dimensions on the installation sticker for customizing your own installation.




← using the VP-FD1 for installing with an intercom

VP-FD1

Front decorative plate with 4 M4 screws



Mounting kit for fixing VPort P06HC and front decorative plate

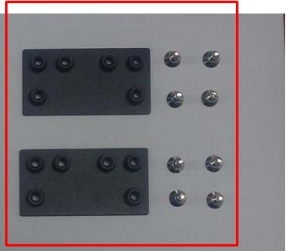

Step 1: Screw the 2 L-type installation plates onto the VPort P06HC. A 5.5 kgf-cm torque is required for onboard environments.


Vertical mountable



Horizontal mountable



Step 2: Use the installation sticker to drill the holes for flush-mounting the VPort P06HC with the VP-FD1.

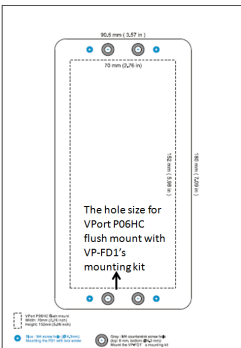

NOTE The screw holes for mounting the 2 VP-FD1's mounting kits are countersunk holes with 8 mm top diameter and 4.3 mm chamfer. Take this into consideration when drilling these 4 screw holes.

Step 3: Install the VP-FD1's mounting kit.

Screw 4 nylock M4 screws on the 4 countersunk screw holes with 2 VP-FD1's mounting kits. A 5.5 kgf-cm torque is required for onboard environments.



Front view



Rear view



Step 5: Mount the VPort P06HC with the VP-FD1's mounting kit.



Step 6: Mount the VP-FD1's front decorative plate on the wall.



NOTE For mounting the VPort P06HC or the VP-FD1 on the wall, a 8.0 kgf-cm torque is required for all screws.

NOTE The type and color of VP-FD1 can be customized by request. Please contact a Moxa sales representative for this customization service.

Software Installation


Step 1: Configure the VPort P06HC-1MP-M12's IP address.

When the VPort P06HC-1MP-M12 is first powered on, the POST (Power On Self Test) will run for a few moments (about 30 seconds). The network environment determines how the IP address is assigned.

Network Environment with DHCP Server

For this network environment, the unit's IP address will be assigned by the network's DHCP server. Refer to the DHCP server's IP address table to determine the unit's assigned IP address. You may also use the Moxa VPort and EtherDevice Configurator Utility (edscfgui.exe), as described below:

Using the Moxa VPort and EtherDevice Configurator Utility (edscfgui.exe)

1. Run the **edscfgui.exe** program to search for the VPort. After the utility's window opens, you may also click on the **Search** button  to initiate a search.

- When the search has concluded, the Model Name, MAC address, IP address, serial port, and HTTP port of the VPort will be listed in the utility's window.

Model	IP Address	MAC Address	Status	Name	LC	Model	Serial No	IP Address	Netmask	Gateway	MAC Address	Serial No	Firmware Ver.	BuildTime	Http Ver.	Http port
VPort 354	172.19.16.60	0090E820D2F3				VPort P06HC-1MP-M12-CAM36	01206	172.19.16.32	255.255.255.0	172.19.16.254	0090E8233e30b	01206	1.0.0	13112020	1.0.0	80
VPort P06HC-1MP-M12-CAM36	172.19.16.15	0090E8112233														
EDS-408A-MM-SC	172.19.16.45	0090E80D6673														
EDS-408A-MM-ST	192.168.127.253	0090E823F37D														
EDS-408A-MM-ST	192.168.127.253	0090E823F3D2														
EDS-P506A-4POE	172.19.16.252	0090E8209DE1														
EDS-P506A-4POE	192.168.127.253	0090E833DAF6														
VPort26A	172.19.16.88	0090E8262728														
VPort P06-1MP-M12-CAM36	192.168.127.6	0090E8334F64														
VPort 461	172.19.16.16	0090E82173D7														
VPort26A	172.19.16.31	0090E8260101														
VPort 16-M12 (Prolan)	172.19.16.59	0090E8060116														
VPort P06-1MP-M12	172.19.16.40	0090E8000003														
VPort P06-1MP-M12-MIC-CAM36 (LED)	172.19.16.51	0090E8060606														
VPort P06HC-1MP-M12-CAM36	172.19.16.27	0090E8060C01														
VPort 351	172.19.16.47	0090E8152C2F														
VPort36	172.19.16.228	0090E8360109														
VPort 461	172.19.16.42	0090E82173B8														

You can double click the selected VPort, or use the IE web browser to access the VPort's web-based manager (web server).

Non DHCP Server Network Environment

If your VPort P06HC-1MP-M12 is connected to a network that does not have a DHCP server, then you will need to configure the IP address manually. The default IP address of the VPort 16-M12 is 192.168.127.100 and the default subnet mask is 255.255.255.0. Note that you may need to change your computer's IP address and subnet mask so that the computer is on the same subnet as the VPort.

To change the IP address of the VPort manually, access the VPort's web server, and then navigate to the **System Configuration** → **Network** → **General** page to configure the IP address and other network settings. Check *Use fixed IP address* to ensure that the IP address you assign is not deleted each time the VPort is restarted.

Step 2: Accessing the VPort P06HC-1MP-M12's web-based manager

Type the IP address in the web browser's address input box and then press enter.

Step 3: Install the ActiveX Control Plug-in

A security warning message will appear the first time you access the VPort's web-based manager. The message is related to installing the VPort ActiveX Control component on your PC or notebook. Click Yes to install this plug-in to enable the IE web browser for viewing video images.




NOTE For Windows XP SP2 or later operating systems, the ActiveX Control component will be blocked for system security reasons. In this case, the VPort's security warning message window may not appear. You should unlock the ActiveX control blocked function or disable the security configuration to enable the installation of the VPort's ActiveX Control component.

Step 4: Access the homepage of the VPort P06HC-1MP-M12's web-based manager.

After installing the ActiveX Control component, the homepage of the VPort P06HC-1MP-M12's web-based manager will appear. Check the following items to make sure the system was installed properly:


1. Video Images
2. Video Information

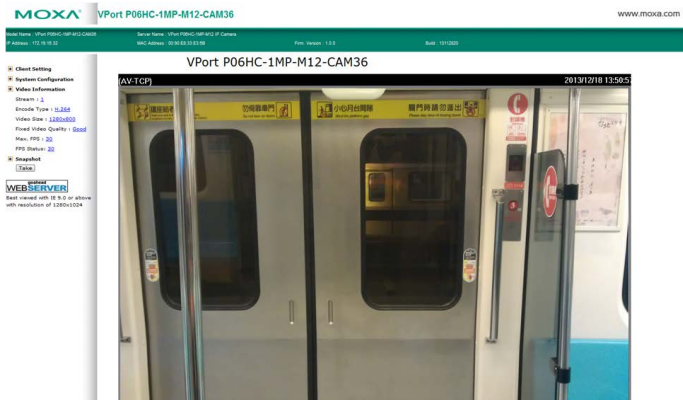

Step 5: Access the VPort's system configuration.

Click on **System Configuration** to access the overview of the system configuration to change the configuration. **Model Name**, **Server Name**, **IP Address**, **MAC Address**, and **Firmware Version** appear on the green bar near the top of the page. Use this information to check the system information and installation.

For details of each configuration, check the user's manual on the software CD.

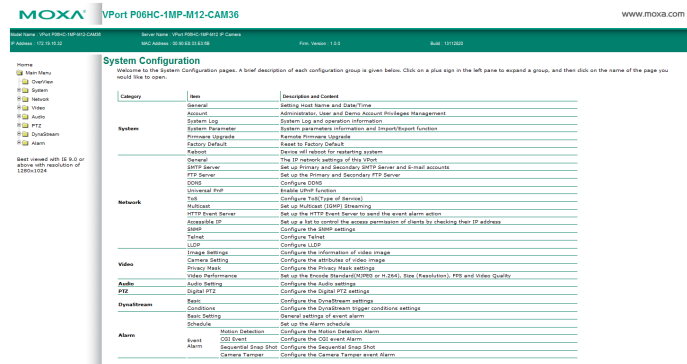

Wiring Requirements



ATTENTION


Safety First!

Be sure to disconnect the power cord before installing and/or wiring your Moxa VPort PO6HC-1MP-M12. Calculate the maximum possible current in each power wire and common wire. Observe all electrical codes dictating the maximum current allowable for each wire size. If the current goes above the maximum ratings, the wiring could overheat, causing serious damage to your equipment.


You should also pay attention to the following:

- Use separate paths to route wiring for power and devices. If power wiring and device wiring paths must cross, make sure the wires are perpendicular at the intersection point.
- You can use the type of signal transmitted through a wire to determine which wires should be kept separate. The rule of thumb is that wiring that shares similar electrical characteristics can be bundled together.
- Keep input wiring and output wiring separated.
- We strongly advise labeling wiring to all devices in the system.


Dimensions (mm)

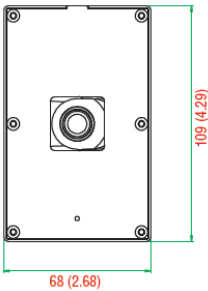

Front View

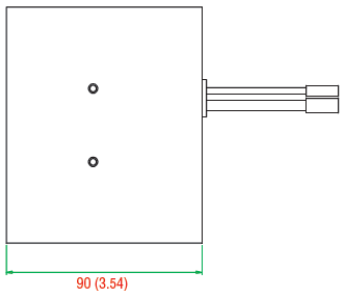

Bottom View

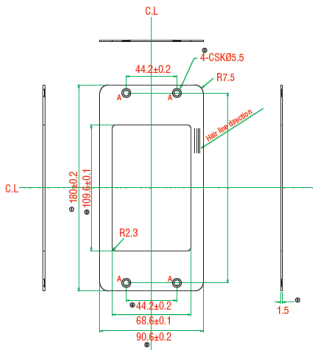

VP-FD1 (front decorative plate)

Specifications

Input Current	0.13 A @ 48 VDC
Operating Temperature	-25 to 55°C (-13 to 131°F)
Storage Temperature	-40 to 85°C (-40 to 185°F)