


EM-1240 Series

Arm-based 192 MHz industrial computer-on-module with 2 LAN ports and 4 serial ports



Features and Benefits

- MOXA ART Arm9 32-bit 192 MHz processor
- 16 MB RAM, 8 MB flash disk onboard
- 4 software-selectable RS-232/422/485 serial ports
- Dual 10/100 Mbps Ethernet ports for network redundancy
- SD signals supported for external SD slot connection
- Built-in RTC, buzzer
- 10 GPIOs reserved for system integration
- Ready-to-run μ Clinux kernel 2.6 platform
- Full-function development kit for quick evaluation and application development
- -40 to 75°C wide-temperature models available

Certifications



Introduction

The EM-1240 embedded module features 4 RS-232/422/485 serial ports, dual Ethernet ports, and an SD slot for external storage expansion. The modules have a compact design that can be easily integrated with industrial applications such as gas stations, vending machines, and ticketing machines, and offer a powerful serial communication capability for better system integration.

Programmers will find that the preinstalled, ready-to-run μ Clinux platform and the full-function development kit make it easy to develop software and build a reliable communication base for industrial automation applications. In addition, a wide-temperature model is also available to provide a reliable solution for harsh environments.

Appearance


Top View

MOXA ART ARM9 32-bit
Communication Processor




Onboard Intel NOR Flash 8 MB

Bottom View



onboard Flash 16 MB

Development Kit

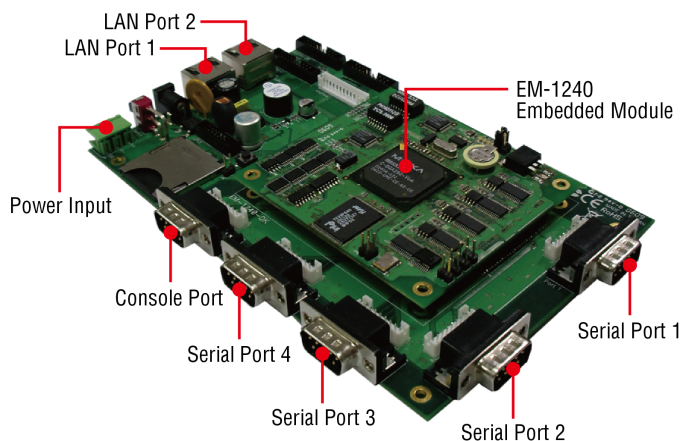

Specifications

Computer

CPU	MOXA ART Arm9, 192 MHz
SDRAM	16 MB
Flash	NOR Flash, 8 MB
Pre-installed OS	μCLinux
Storage Slot	SD slots x 1

Ethernet Interface

Ethernet Ports	Auto-sensing 10/100 Mbps ports (RJ45 connector) x 2
Magnetic Isolation Protection	1.5 kV (built-in)

LED Indicators

System	System Ready x 1
Serial	2 per port (Tx, Rx)

Serial Interface

Serial Ports	4 x RS-232/422/485
Console Port	1 x 4-pin header to DB9 console port

Serial Signals


Data Bits	5, 6, 7, 8
Stop Bits	1, 1.5, 2

Parity	None, Even, Odd, Space, Mark
Flow Control	RTS/CTS, XON/XOFF, ADDC® (automatic data direction control) for RS-485, RTS Toggle (RS-232 only)
Baudrate	50 bps to 921.6 kbps
RS-232	TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND
RS-422	Tx+, Tx-, Rx+, Rx-, GND
RS-485-4w	Tx+, Tx-, Rx+, Rx-, GND
RS-485-2w	Data+, Data-, GND
Power Parameters	
Input Voltage	5 VDC
Input Current	500 mA @ 5 VAC
Power Consumption	2.5 W
Reliability	
Alert Tools	Built-in buzzer and RTC (real-time clock)
Automatic Reboot Trigger	Built-in WDT
Physical Characteristics	
Dimensions	EM-1240 Module: 90 x 80 mm (3.54 x 3.15 in) EM-1240 Development Kit: 117 x 115 mm (6.97 x 4.53 in)
Weight	EM-1240 Module: 50 g (0.11 lb) EM-1240 Development Kit: 200 g (0.44 lb)
Environmental Limits	
Operating Temperature	EM-1240-LX: -10 to 60°C (14 to 140°F) EM-1240-T-LX: -40 to 75°C (-40 to 167°F)
Storage Temperature (package included)	EM-1240-LX: -20 to 80°C (-4 to 176°F) EM-1240-T-LX: -40 to 85°C (-40 to 185°F)
Standards and Certifications	
EMC	EN 55032/24, EN 61000-3-2 Class A, EN 61000-3-3, CISPR 32, FCC Part 15B Class A
Green Product	RoHS, CRoHS, WEEE
MTBF	
Time	385,419 hrs
Standards	Telcordia (Bellcore) Standard
Warranty	
Warranty Period	5 years
Details	See www.moxa.com/warranty

Dimensions


EM-1240

Unit: mm (inch)

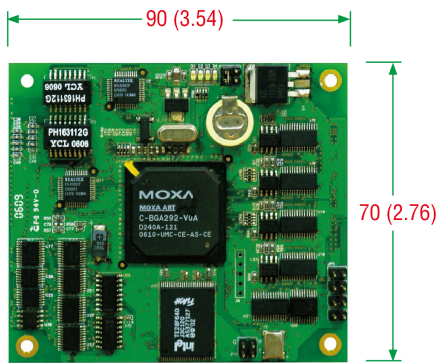

EM-1240-DK

Unit: mm (inch)

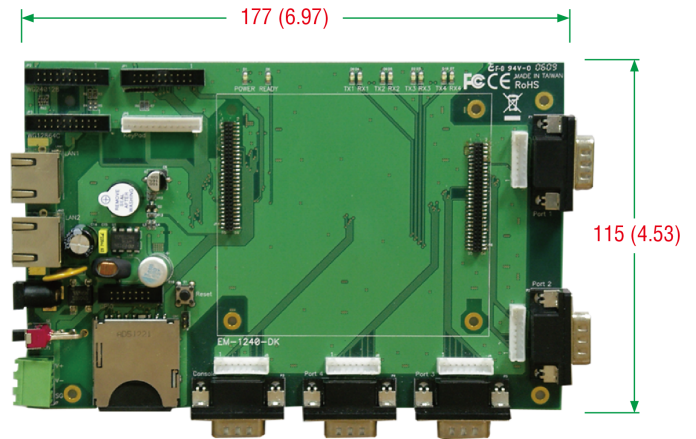

Ordering Information

Model Name	Description	Operating Temp.
EM-1240-LX	Arm-based embedded core module with 4 serial ports, dual LAN ports, SD slot, μ Linux OS, -10 to 60°C operating temperature	-10 to 60°C
EM-1240-T-LX	Arm-based embedded core module with 4 serial ports, dual LAN ports, SD slot, μ Linux OS, -40 to 75°C operating temperature	-40 to 75°C

© Moxa Inc. All rights reserved. Updated Jan 22, 2020.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.